




Dimensions in "mm"

329usd/pc

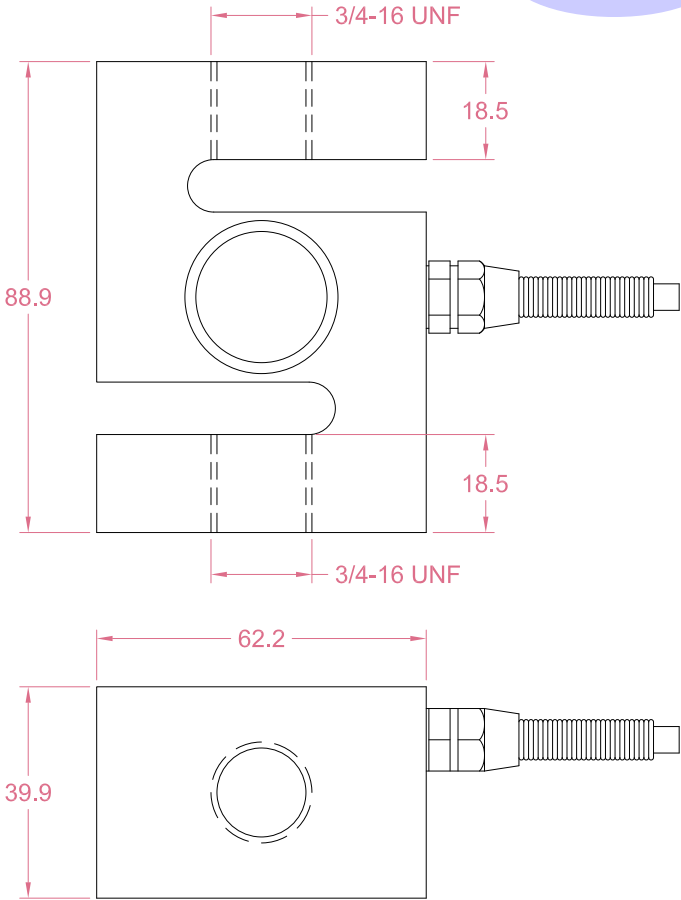

Order example:

1 x LSB400 - 5klb

Quantity Model Capacity

Email to sales@loadcellsensor.com for a quote

Specifications			
Rated Capacity	5/10 klb		
Rated Output	2.0 mV/V	Compensated Temp.	0...+80°C
Excitation	3~15V	Operating Temp.	-40...+120°C
Zero Balance	±0.05 mV/V	Temp. Coeff. of Zero	±0.005% F.S./°C
Nonlinearity	±0.1% F.S.	Temp. Coeff. of Span	±0.005% F.S./°C
Hysteresis	±0.1% F.S.	Input Resistance	380±30 Ohms
Nonrepeatability	±0.05% F.S.	Output Resistance	352±5 Ohms
Creep(3min)	±0.05% F.S.	Insulation Resistance	>2000M Ohms(50V)
Safe Load Limit	150% F.S.	IP Rating	IP65
Breaking Load	200% F.S.	Element Material	Stainless steel
Cable	Ø5*5000mm 4-conductor shielded cable		


• LCS reserves the right to modify its design and specifications without notice

P:1/2






Load direction

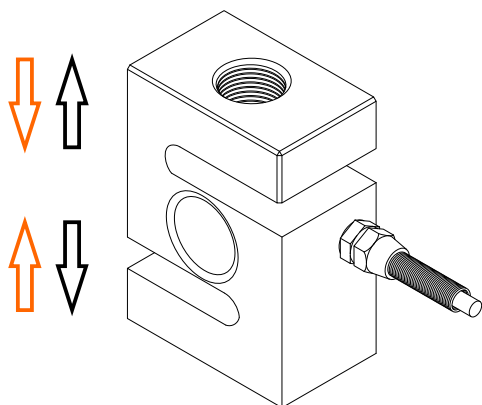

Wiring Code@Tension

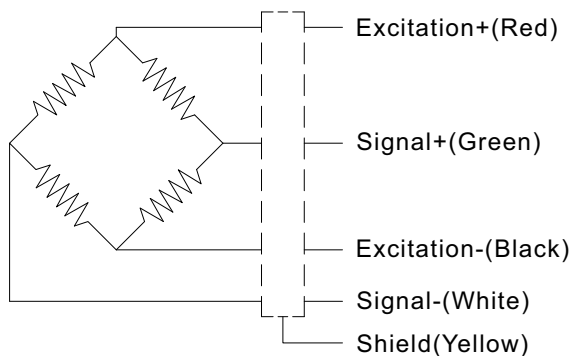

Shield is NOT connected to the sensor body

